

BKT

GROWING TOGETHER

LAWN & GARDEN

AGRICULTURAL TIRES








LAWN & GARDEN

AGRICULTURAL TIRES

Taking care of a garden means to do some gardening without damaging it. It is hence essential that tires are gentle to the terrain without compromising the growth of grass and without leaving an unaesthetic impact. For this reason, agility, power and precision are needed so that small tractors and mowers can do their best on the spot. It is here, where BKT tires come into play – perfect for all Lawn & Garden applications: An extended tire life-cycle, excellent handling plus extraordinary puncture resistance in addition to a “gentle” approach on the terrain are their distinguishing features. Find out which BKT tire best suits your needs.

TECHNOLOGIES AND PERFORMANCE



Radial tires have cord plies that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.



Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance, puncture resistance and high load capacity.

LAWN & GARDEN TIRES



TR 360



[p. 6]



LG SMOOTH



[p. 7]



LG 306



[p. 8]



TR 315



[p. 15]



TR 313



[p. 16]



TRAC MASTER



[p. 17]



LG 307



[p. 12]



LG 408



[p. 13]



LG RIB



[p. 14]



TR 317



[p. 18]



GF 304



[p. 19]



TR 319



[p. 20]



GF 305 CLASSIC



[p. 21]





TR 360

TR 360 is suitable for implement machinery in on-and-off-the-road transport as well as lawn and garden applications. The particular tread design along with the casing structure ensures a long tire life-cycle.

Performance



Durability

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	18 X 7 - 8	5.5	-	180	460	202	1334	STD	6	TL	-

STD: Standard



LG SMOOTH

LG SMOOTH is a lawn and garden tire suitable for mowers and small tractors. While the tire is gentle on the ground, the enhanced design eases handling. LG SMOOTH is available in an "aramid-belted" version for users who need strengthened puncture resistance.



Bias

Technologies



Aramid Belted

Performance



Field Protection



High Puncture Resistance

Ø 10"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	18 X 10.50 - 10	8.51 - 55; 1 - 70; 1 - 90	8½ JA	254	460	207	1334	STD	2	TL	-
	20 X 10.00 - 10	8.001 - 55	7.001 - 55; 1 - 70; 1 - 90	245	500	223	1450	STD	2	TL	-
	20 X 10.00 - 10	8.001 - 55	7.001 - 55; 1 - 70; 1 - 90	245	500	223	1450	STD	4	TL	-
	20 X 10.00 - 10	8.001 - 55	7.001 - 55; 1 - 70; 1 - 90	245	500	223	1450	AB	6	TL	-
	20 X 10.00 - 10	8.001 - 55	7.001 - 55; 1 - 70; 1 - 90	245	500	223	1450	STD	6	TL	-

STD: Standard - AB: Aramid Belted





LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for small tractors. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time. LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.

Technologies



Aramid Belted

Performance



Field Protection



Comfort



High Puncture Resistance

Ø 5"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	11 X 4.00 - 5	3.00A	-	104	272	120	789	STD	4	TL	-
Ø 6"	13 X 5.00 - 6	3.50A	-	127	325	144	943	STD	4	TL	-
	13 X 5.00 - 6	3.50A	-	127	325	144	943	STD	6	TL	-
	15 X 6.00 - 6	4.50A	-	152	365	159	1059	STD	4	TL	-
	15 X 6.00 - 6	4.50A	-	152	365	159	1059	STD	6	TL	-
Ø 8"	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	4	TL	-
	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	6	TL	-
	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	AB	6	TL	-
	16 X 6.50 - 8	5.375 I - 55; I - 70; I - 90	-	170	408	182	1183	STD	8	TL	-
	18 X 8.50 - 8	5.375 I - 55; I - 70; I - 90	-	184	410	-	-	AB	4	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	204	1346	STD	4	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	204	1346	STD	6	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	204	1346	AB	6	TL	-
	18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	4	TL	-
	18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	STD	6	TL	-
	18 X 9.50 - 8	7.00 I - 55; I - 70; I - 90	-	230	470	206	1363	AB	6	TL	-

STD: Standard - AB: Aramid Belted



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	4	TL	-
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	STD	6	TL	-
	20 X 10.00 - 8	8.00 I - 55	7.00 I - 55; I - 70; I - 90	254	508	221	1473	AB	6	TL	-
Ø 10"	18 X 8.50 - 10	7.00 I - 55; I - 70; I - 90	-	210	460	209	1340	STD	4	TL	-
	20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	4	TL	-
	20 X 8.00 - 10	6.00 I - 55; I - 70; I - 90	6 JA	205	500	223	1450	STD	6	TL	-
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	4	TL	-
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	STD	6	TL	-
	20 X 10.00 - 10	8.00 I - 55	7.00 I - 55	250	508	226	1473	AB	6	TL	-
Ø 12"	23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1709	STD	4	TL	-
	23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1709	STD	6	TL	-
	23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1709	AB	6	TL	-
	23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1709	STD	8	TL	-
	23 X 8.50 - 12	7.00 I - 55; I - 70; I - 90	7 JA	210	575	258	1709	STD	12	TL	-
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	4	TL	-

STD: Standard - AB: Aramid Belted



LG 306

LG 306 is a lawn and garden tire suitable for mowers. In some sizes, LG 306 is also fit for small tractors. The specific tread pattern makes the tire gentle on the ground, easing handling at the same time. LG 306 is available in an "aramid-belted" version for users who need strengthened puncture resistance.

Technologies



Aramid Belted

Performance



Field Protection



Comfort



High Puncture Resistance

Ø 12"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	6	TL	-
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	AB	6	TL	-
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	8	TL	-
	23 X 10.50 - 12	8.5 I - 55	7.00 I - 55; I - 70; I - 90	260	585	262	1697	STD	12	TL	-
	24 X 12.00 - 12	9.5 AT	9.0 AT; 8.5 AT; 8.0 AT	298	610	276	1774	STD	4	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	STD	4	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	AB	6	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	STD	8	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	AB	8	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	STD	12	TL	-
	26 X 12.00 - 12	10.50 I - 55; I - 70; I - 90	10½ JA; 8½ JA	310	640	283	1879	STD	14	TL	-

STD: Standard - AB: Aramid Belted



Ø 14"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	24 X 8.50 - 14	7 JA	-	210	610	280	1769	STD	4	TL	-
	25 X 8.50 - 14	7.00 I - 55; I - 70; I - 90	-	220	638	286	1889	STD	6	TL	-
Ø 15"	27 X 8.50 - 15	7.00 JA	-	216	680	308	1970	STD	4	TL	-
	27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	4	TL	-
	27 X 10.50 - 15	8.00 LB	-	272	705	318	2042	STD	12	TL	-
	29 X 12.50 - 15	10	-	318	740	-	-	AB	10	TL	-
	31 X 15.5 - 15	13 LB	-	391	792	350	2313	STD	4	TL	-
	31 X 15.5 - 15	13 LB	-	391	792	350	2313	AB	8	TL	-
Ø 16"	13.6 - 16	W 12	W 11	388	975	439	2793	STD	4	TL	-
Ø 16,5"	33 X 15.50 - 16.5	12.00	-	396	840	374	2495	STD	10	TL	-
Ø 20"	38 X 14.00 - 20	W 11	W 11 H	375	980	435	2894	STD	4	TL	-
	44 X 18.00 - 20	W 14 L	W 14 LH	475	1180	518	3509	STD	4	TL	-

STD: Standard - AB: Aramid Belted



LG 307

LG 307 is a lawn and garden tire suitable for mowers. The specific tread pattern makes the tire gentle on the ground to prevent turf damages, easing handling at the same time.

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	4	TL	-
	20 X 10.00 - 8	8.00 I - 55; I - 70; I - 90	7.00 I - 55; I - 70; I - 90	255	495	215	1435	STD	6	TL	-
Ø 10"	20 X 12.00 - 10	8.5 I - 55; I - 70; I - 90	-	285	500	221	1435	STD	4	TL	-

STD: Standard



LG 408

LG 408 is a lawn and garden tire suitable for mowers and small tractors. The specific tread pattern makes the tire gentle on the ground to prevent turf damages making handling easier at the same time. LG 408 is available in an "aramid-belted" version for users who need strengthened puncture resistance.

Ø 12"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	4	TL	-
	24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	STD	6	TL	-
	24 X 13.00 - 12	10.5 I - 55; I - 70; I - 90	-	320	605	269	1755	AB	6	TL	-
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	4	TL	-
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	6	TL	-
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	AB	6	TL	-
	26.5 X 14.00 - 12	12.00 I	-	380	665	293	1929	STD	10	TL	-

STD: Standard - AB: Aramid Belted

Performance



Technologies



Performance





LG RIB

LG RIB is a lawn and garden tire suitable for mowers and small tractors. Its tread pattern has been designed for making the tire gentle on the ground to prevent turf damages making handling easier at the same time. LG RIB is available in an "aramid-belted" version for users who need strengthened puncture resistance.

Technologies



Aramid Belted

Performance



High Puncture Resistance



Steering Control



Field Protection



Comfort

Ø 6"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	13 X 5.00 - 6	3.50A	-	127	325	144	943	STD	4	TL	-
	13 X 5.00 - 6	3.50A	-	127	325	144	943	AB	6	TL	-
	15 X 6.00 - 6	4.50A	-	152	365	159	1059	STD	4	TL	-
	15 X 6.00 - 6	4.50A	-	152	365	159	1059	STD	6	TL	-
	15 X 6.00 - 6	4.50A	-	152	365	159	1059	AB	6	TL	-
Ø 8"	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	4	TT	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	4	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	6	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	AB	6	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	8	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	STD	10	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	170	408	182	1183	AB	10	TL	-
Ø 10"	20 X 10.00 - 10	8.00 I - 55 ; I - 70 ; I - 90	7.00 I - 55 ; I - 70 ; I - 90	236	498	222	1444	STD	4	TL	-

STD: Standard - AB: Aramid Belted



TR 315

TR 315 is suitable for lawn and garden, soil tillage and municipalities operations. It is ideal with implement machinery, trenchers and orchard harvesters. The TR 315 tire has a large contact area which provides excellent grip, great self-cleaning properties and outstanding stability in any condition.



Bias

Performance



Traction



Stability



Self-Cleaning

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	155	408	182	1183	STD	4	TL	-
	16 X 6.50 - 8	5.375 I - 55 ; I - 70 ; I - 90	-	155	408	182	1183	STD	6	TL	-
Ø 12"	23 X 8.50 - 12	7 JA ; 7.00 I - 55 ; I - 70 ; I - 90		205	575	258	1668	STD	4	TL	-
	23 X 8.50 - 12	7 JA ; 7.00 I - 55 ; I - 70 ; I - 90		205	575	258	1668	STD	6	TL	-
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	4	TL	-
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	6	TL	-
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	8	TL	-
	23 X 10.50 - 12	8½ JA	7 JA	255	590	260	1682	STD	10	TL	-
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	4	TL	-
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	8	TL	-
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	10	TL	-
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	SPL	10	TL	-
	26 X 12.00 - 12	10½ JA	8½ JA ; 9½ JA	308	655	289	1905	STD	12	TL	-
Ø 15"	31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	8	TL	-
	31 X 15.50 - 15	13 LB	-	390	800	354	2320	STD	10	TL	-
	31 X 15.50 - 15	10 LB	-	390	800	354	2320	STD	12	TL	-

STD: Standard - SPL: Special



TR 313

TR 313 is a lawn and garden tire suitable for municipality and soil tillage operations with implement machinery, trenchers and orchard harvesters. The large contact area provides excellent grip. The TR 313 tire has been engineered to ensure a high level of stability also in critical operating conditions along with great self-cleaning properties.

Performance



Ø 15"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	31 X 15.50 - 15	13 LB	-	370	770	342	2233	STD	8	TL	-

STD: Standard



TRAC MASTER

TRAC MASTER is a soil tillage and lawn and garden tire, suitable for small tractors and implement machinery. Its tread design provides excellent field protection along with great traction in the fields and optimum self-cleaning properties.



Performance



Ø 12"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	300/60 - 12	10.5	9.5	306	645	285	1885	STD	8	TL	-
Ø 15"	31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	6	TL	-
	31 X 15.50 - 15	13 LB	-	405	810	357	2365	STD	8	TL	-
	33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	6	TL	-
	33 X 15.50 - 15	13 LB	-	404	865	378	2526	STD	8	TL	-

STD: Standard





TR 317



TR 317 is suitable for municipality and soil tillage operations with implement machinery, trenchers and orchard harvesters. The TR 317 tire has a large contact area which provides excellent grip and outstanding stability in any condition along with great self-cleaning properties.

Performance



Traction



Stability



Self-Cleaning

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	STD	4	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	215	450	198	1305	HD	6	TL	-

STD: Standard - HD: Heavy Duty



GF 304



GF 304 is suitable for golf applications with golf carts. GF 304 ensures best comfort and turf protection. GF 304 is also available as "aramid-belted" version to provide increased puncture resistance.

Performance



Field Protection

Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	4	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	AB	4	TL	-
	18 X 8.50 - 8	7.00 I - 55; I - 70; I - 90	-	216	460	202	1334	STD	6	TL	-

STD: Standard - AB: Aramid Belted





TR 319

TR 319 is a tire for implement machinery, orchard harvesters and trenchers in lawn and garden, municipality and soil tillage applications. Featuring a large contact area providing best traction, TR 319 is very suitable for applications on wet surfaces, where stability and self-cleaning properties are required.

Performance



Ø 12"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	26 X 12.00 - 12	10.50 AT	8.0 AT; 8.5 AT; 9.0 AT	318	640	-	-	STD	8	TL	116A3
Ø 15"	29 X 12.50 - 15	10 LB	-	312	755	360	2264	STD	6	TL	98 B
	29 X 12.50 - 15	10 LB	-	312	755	360	2264	STD	8	TL	106 B

STD: Standard



GF 305 CLASSIC

GF 305 CLASSIC is a special tire mainly designed for golf carts. This tire is naturally gentle on the ground and protects the field from damages. GF 305 CLASSIC is a really comfortable tire which makes riding a pleasure.




Performance



Ø 8"	Tire size	RIM		S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	Version	PR	Type	LI/SS
		Rec.	Alt.								
	205/50 - 10	7.00 I - 55	6.00 I - 55; I - 70; I - 90	215	470	211	1363	STD	4	TL	-
	205/50 - 10	7.00 I - 55	6.00 I - 55; I - 70; I - 90	215	470	211	1363	STD	6	TL	-

STD: Standard

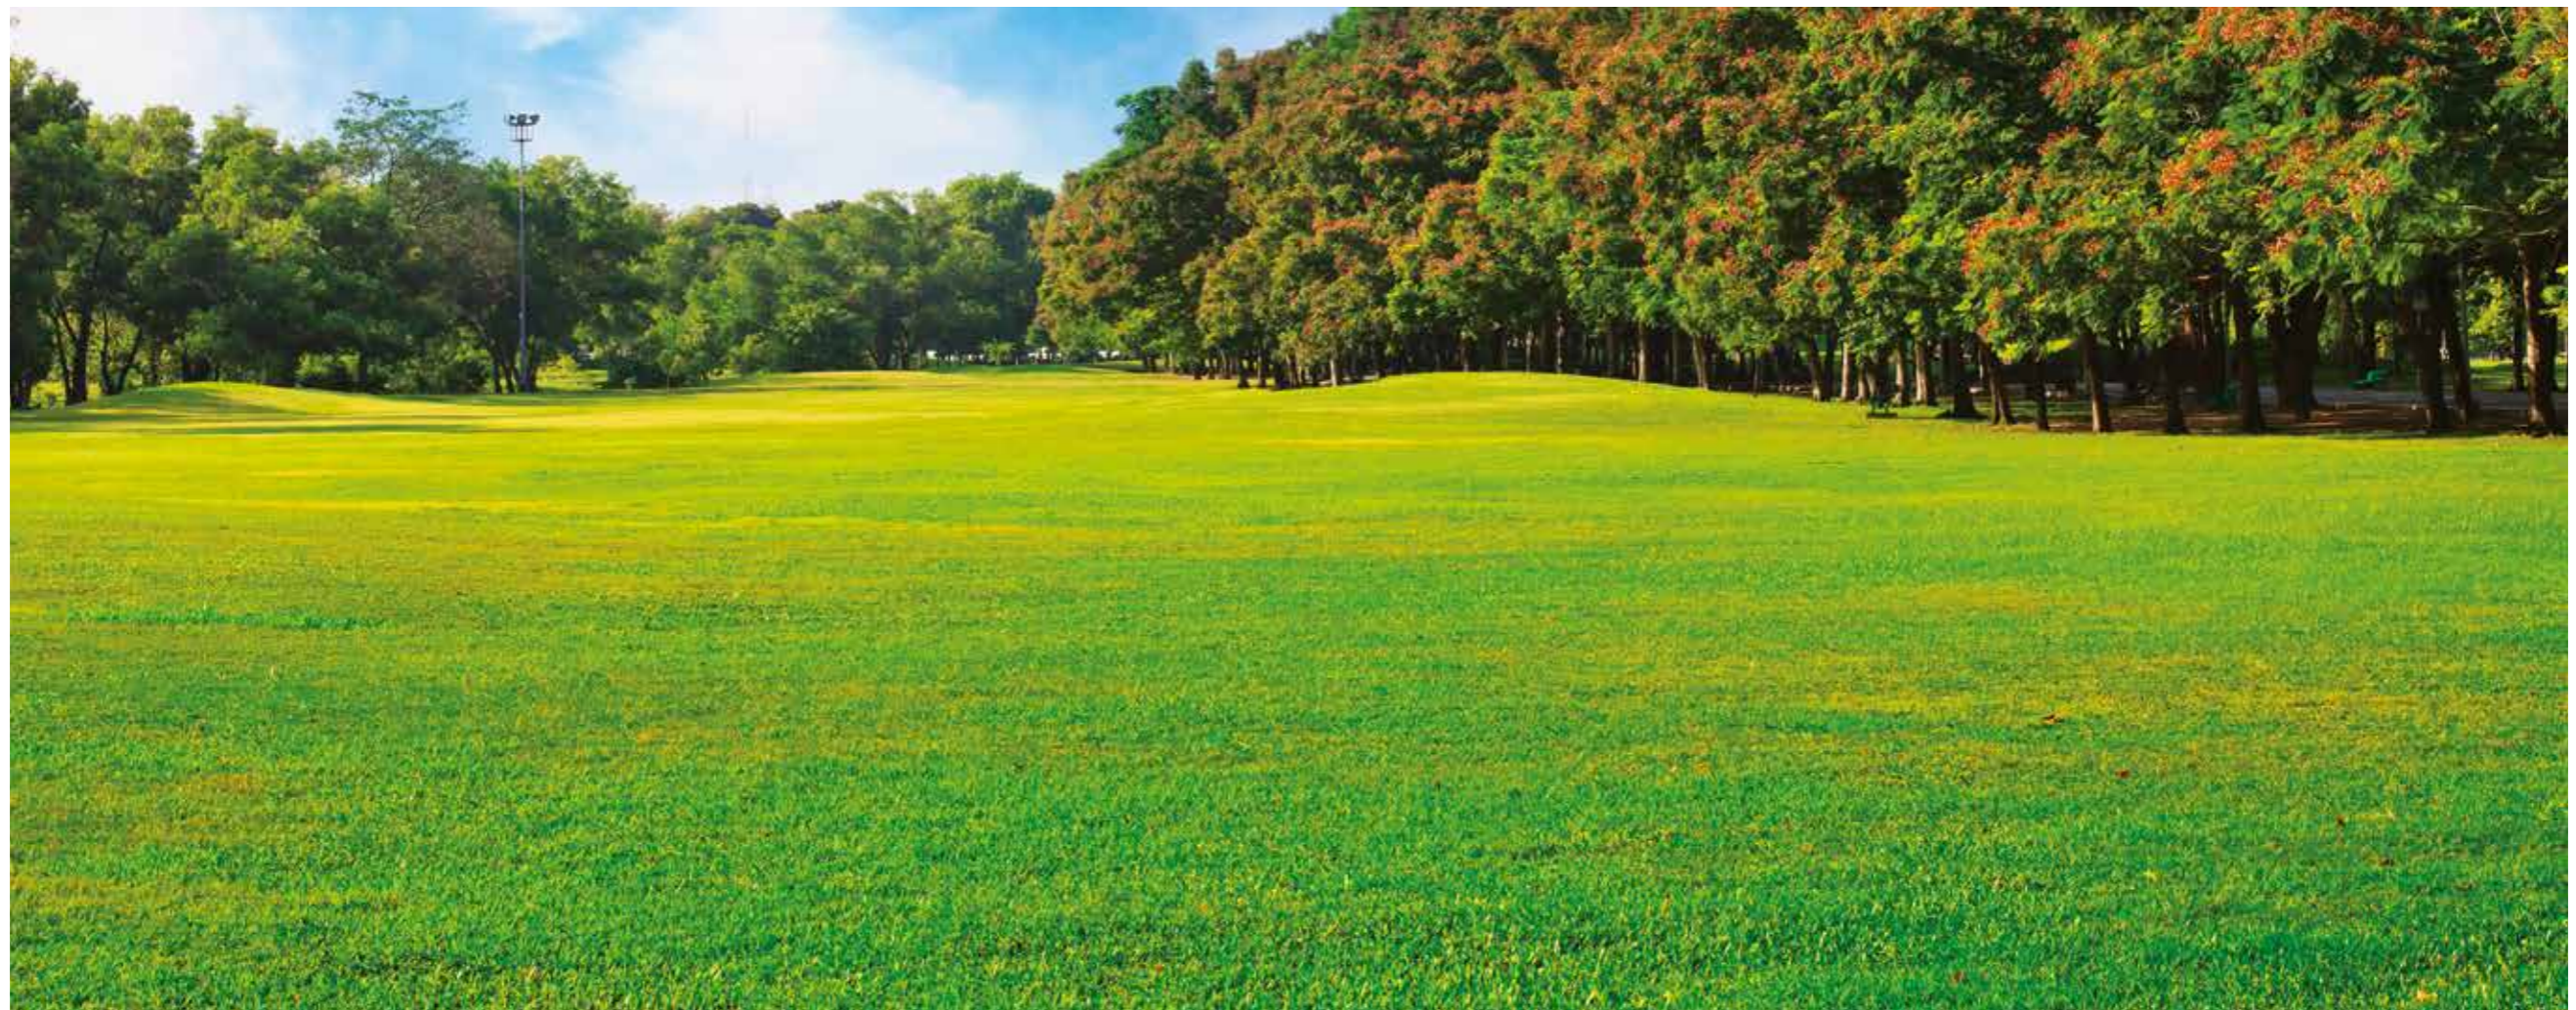

Load Index

The load index is a code that defines a tire's maximum weight capacity at the speed given by its speed symbol provided that the usage conditions recommended by the Manufacturer are fully complied with.

Corresponding values of load index (LI) and load capacity per wheel (kg)

LI	kg	LI	kg	LI	kg	LI	kg
50	190	85	515	120	1400	155	3875
51	195	86	530	121	1450	156	4000
52	200	87	545	122	1500	157	4125
53	206	88	560	123	1550	158	4250
54	212	89	580	124	1600	159	4375
55	218	90	600	125	1650	160	4500
56	224	91	615	126	1700	161	4625
57	230	92	630	127	1750	162	4750
58	236	93	650	128	1800	163	4875
59	243	94	670	129	1850	164	5000
60	250	95	690	130	1900	165	5150
61	257	96	710	131	1950	166	5300
62	265	97	730	132	2000	167	5450
63	272	98	750	133	2060	168	5600
64	280	99	775	134	2120	169	5800
65	290	100	800	135	2180	170	6000
66	300	101	825	136	2240	171	6150
67	307	102	850	137	2300	172	6300
68	315	103	875	138	2360	173	6500
69	325	104	900	139	2430	174	6700
70	335	105	925	140	2500	175	6900
71	345	106	950	141	2575	176	7100
72	355	107	975	142	2650	177	7300
73	365	108	1000	143	2725	178	7500
74	375	109	1030	144	2800	179	7750
75	387	110	1060	145	2900	180	8000
76	400	111	1090	146	3000	181	8250
77	412	112	1120	147	3075	182	8500
78	425	113	1150	148	3150	183	8750
79	437	114	1180	149	3250	184	9000
80	450	115	1215	150	3350	185	9250
81	462	116	1250	151	3450	186	9500
82	475	117	1285	152	3550	187	9750
83	487	118	1320	153	3650	188	10000
84	500	119	1360	154	3750	189	10300

Speed Symbol

The speed code is a value that indicates the maximum admitted speed at which the tire can carry the weight corresponding to its load index provided that the usage conditions recommended by the Manufacturer are fully complied with.

Speed symbol	A1	A2	A3	A4	A6	A8	B	C	D	E	F	J
km/h	5	10	15	20	30	40	50	60	65	70	80	100
mph	3	6	9	12	19	25	31	37	40	43	50	62



Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
 Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica,133
 20831 Seregno (MB), Italy
 Tel: (+39) 0362 33 03 28
 (+39) 0362 32 51 07
 Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West, Suite 240
 Copley, (Akron) Ohio 44321, USA
 Tel: (+1) 330 836 1090
 Fax: (+1) 330 836 1091
 Toll Free: (+1) 888 660 0662

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
 Toronto, Ontario M5J 1R7, Canada
 Tel: AG/IND (+1) 905 641 5636
 OTR (+1) 780 888 5667
 Fax: (+1) 416 229 1711



bkt-tires.com

Proud Sponsor of

